

# Quick-Start Guide

## Wyse® V class Thin Clients, Model VX0

VX0 Products: V00, V30, V50, V90, VR0

See accompanying documents in shipping carton for License Agreement and Warranty information.



**Important:** A printed copy of the Wyse Technology End User License Agreement is included in the shipping box and provided for your reference only. The license at <http://www.wyse.com/license> as of the purchase date is the controlling licensing agreement. By copying, using, or installing the software or the product, you agree to be bound by those terms.

**Caution:** Improper connection, mounting, or use of this product could result in component failure and/or flash memory corruption. Read Caution Statements before setting up and operating the thin client.

### Thin Client Components

To attach the vertical foot, rotate the thin client until the power button is toward the top. Follow the direction of the arrows on the underside of the foot to slide the foot onto the spine at the bottom of the thin client until it lines up with the threaded hole. Secure the vertical foot with the thumb screw provided.

- 1 +12V Power adapter input
- 2 PS/2-type keyboard port
- 3 Video port
- 4 USB port (2)
- 5 Parallel port
- 6 Serial port
- 7 Secure clip for DC power cord
- 8 PS/2-type mouse port
- 9 Serial port
- 10 Network port, 10/100Base-T
- 11 CardBus/PCMCIA card slot with cover
- 12 Lock receptacle
- 13 Power on/off button
- 14 LED (amber: standby; green: on)
- 15 Internal smart card reader (optional)\*
- 16 Microphone in
- 17 Speaker out
- 18 USB port
- 19 PS/2-type mouse port

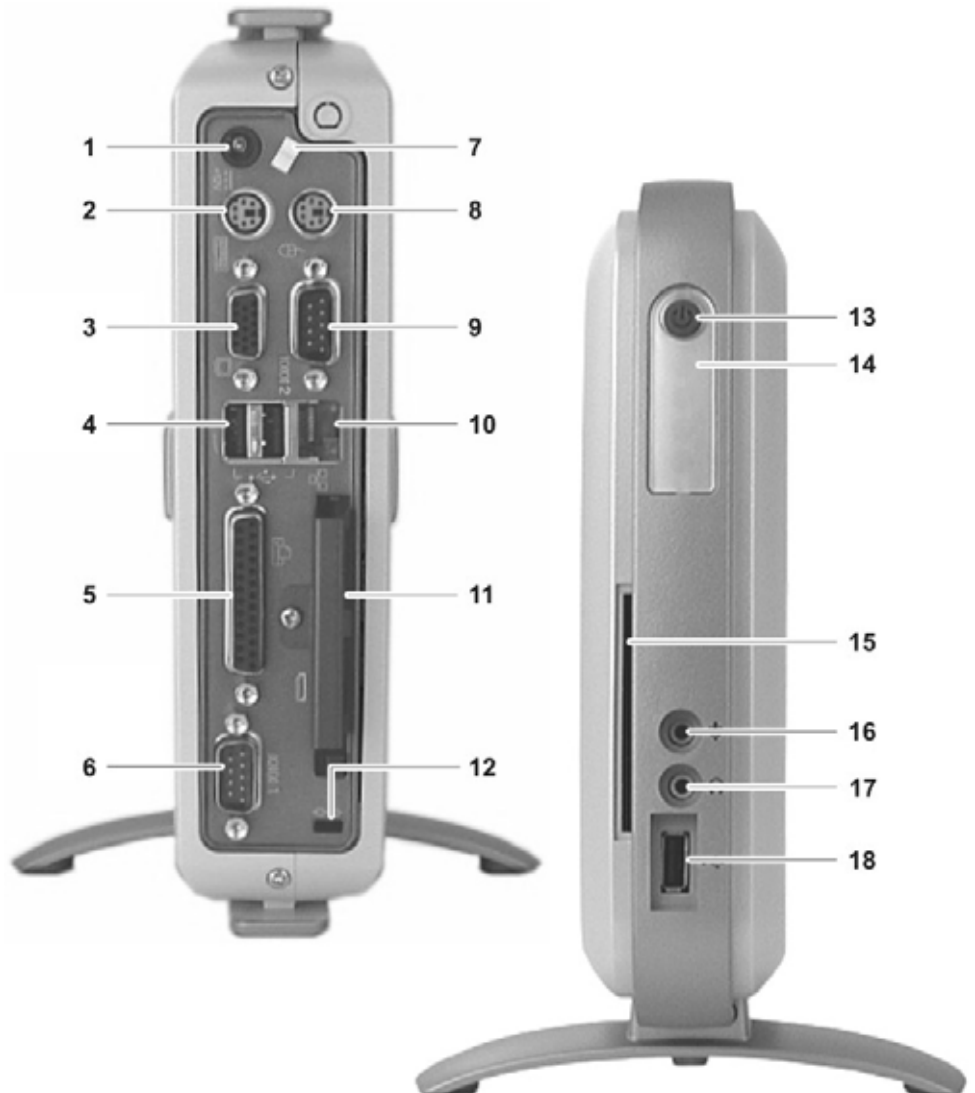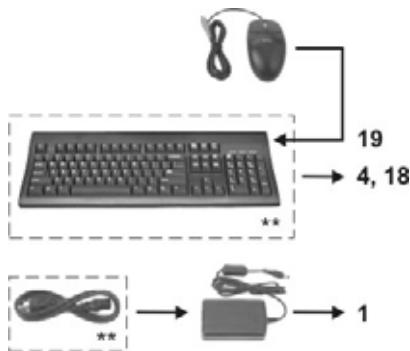

\* Insert smart card with electrical contacts facing outward.

\*\*Supplied for U.S.A.; in other locales, check package contents or contact your Wyse reseller.

---

## Thin Client Installation

Refer to the figures and proceed as follows:

---

### Caution Statements

Improper connection, mounting, or use of this product could result in component failure or undesired interference. Read the following caution statements before setting up and operating the thin client.

#### Setup

- Do not connect to AC power until all other connections (including the power adapter) are made. Connecting or disconnecting components or equipment on the back panel when the thin client is receiving AC power can cause power surges and damage the device.
- Do not force a connector into its socket. If any undue resistance is encountered, ensure that the connector is correctly oriented to the receptacle.

#### Orientation and Venting

- Mount the thin client only as shown or in accordance with the instructions provided with Wyse-approved mounting accessory kits. Improper orientation could inhibit the dissipation of heat from the device and damage it.
- Allow sufficient space around the thin client for ventilation; do not place the device in any enclosure that restricts airflow around the device; do not place any objects on the device or block the vent holes under the device. Find environmental operating specifications in the thin client's datasheet located at: <http://www.wyse.com/products/winterm>

#### Power Sources

- To ensure regulatory compliance, use only the power adapter included in the shipping carton, or a Wyse-approved equivalent, with the thin client. Refer to the regulatory notices in the thin client's documentation (for Products V00 and VR0, refer to any Model VX0 thin client's regulatory notices).
- Accidental loss of power can damage the thin client. Avoid connecting it to any power outlet which can be accidentally switched off. Do not hard reset the thin client by holding down the power button during normal operation.
- When turning off the thin client, be sure to perform a complete shutdown (via the user interface or a light press on the power button). Do not disconnect the AC power cord, DC power cord, or shut off power at a circuit breaker (including power strips), etc., to turn off the device.
- Surge protectors for electrical devices are recommended in areas of lightning. However, when lightning is occurring, your equipment should be properly shut down and unplugged from AC power until the storm has passed.
- Be very careful to not interrupt power while the thin client is downloading a software update.

---

## Connect

Refer to the figures and proceed as follows:

1. Place the thin client on a desk, or use a Wyse-approved mounting accessory kit.
2. Make all necessary connections (video display and keyboard with mouse are required). Connection to a 10/100 BaseT Ethernet network is required unless an optional WiFi network adapter is used for wireless connection to a network. Additional connections of peripheral devices may be made to the other ports.
3. Connect the power adapter to the thin client power input before connecting to a 100-240V AC, 50-60 Hz electrical outlet. Wait until the initialization sequence is completed (the amber light on the power button will go off), and then press the power button on the thin client to apply power.

---

## Configure

**Products V30, V50, and V90** - After power-on, the thin client initially goes through several boot sequence procedures before the operating system loads. Information about setting up your server environment is available in the thin client's documentation.

**Products V00 and VR0** - Wyse Streaming Manager software is required; no other configuration is needed. Information about setting up your server environment is available in the Wyse Streaming Manager documentation.

---

## Need more information?

**Wyse Reference Manuals (Products V30, V50, and V90)** - User, Administrator, and related documentation is available at: <http://www.wyse.com/manuals>

**Wyse-Approved Mounting Accessory Kits** - Information about approved mounting accessory kit options is available at: <http://www.wyse.com/products/accessories/mounting.asp>

**Wyse Service and Support Web Site** - Upgrade software images for installation on your FTP file server are available at: <http://www.wyse.com/serviceandsupport/support/askwyse.asp>

**Wyse Device Manager** - Information about Wyse remote management software is available at: <http://www.wyse.com/bundle>

**Wyse Streaming Manager** - Information about Wyse Streaming Manager software is available at: <http://www.wyse.com/products/software/streamingmanager>

**Wyse Warranty Registration** - Wyse's warranty registration\* process is available at: <http://www.wyse.com/serviceandsupport/register.asp>

\*The standard warranty is three years from the date of purchase.

